


# I-94 WORK ZONE PREPARATION

MARCH 2018

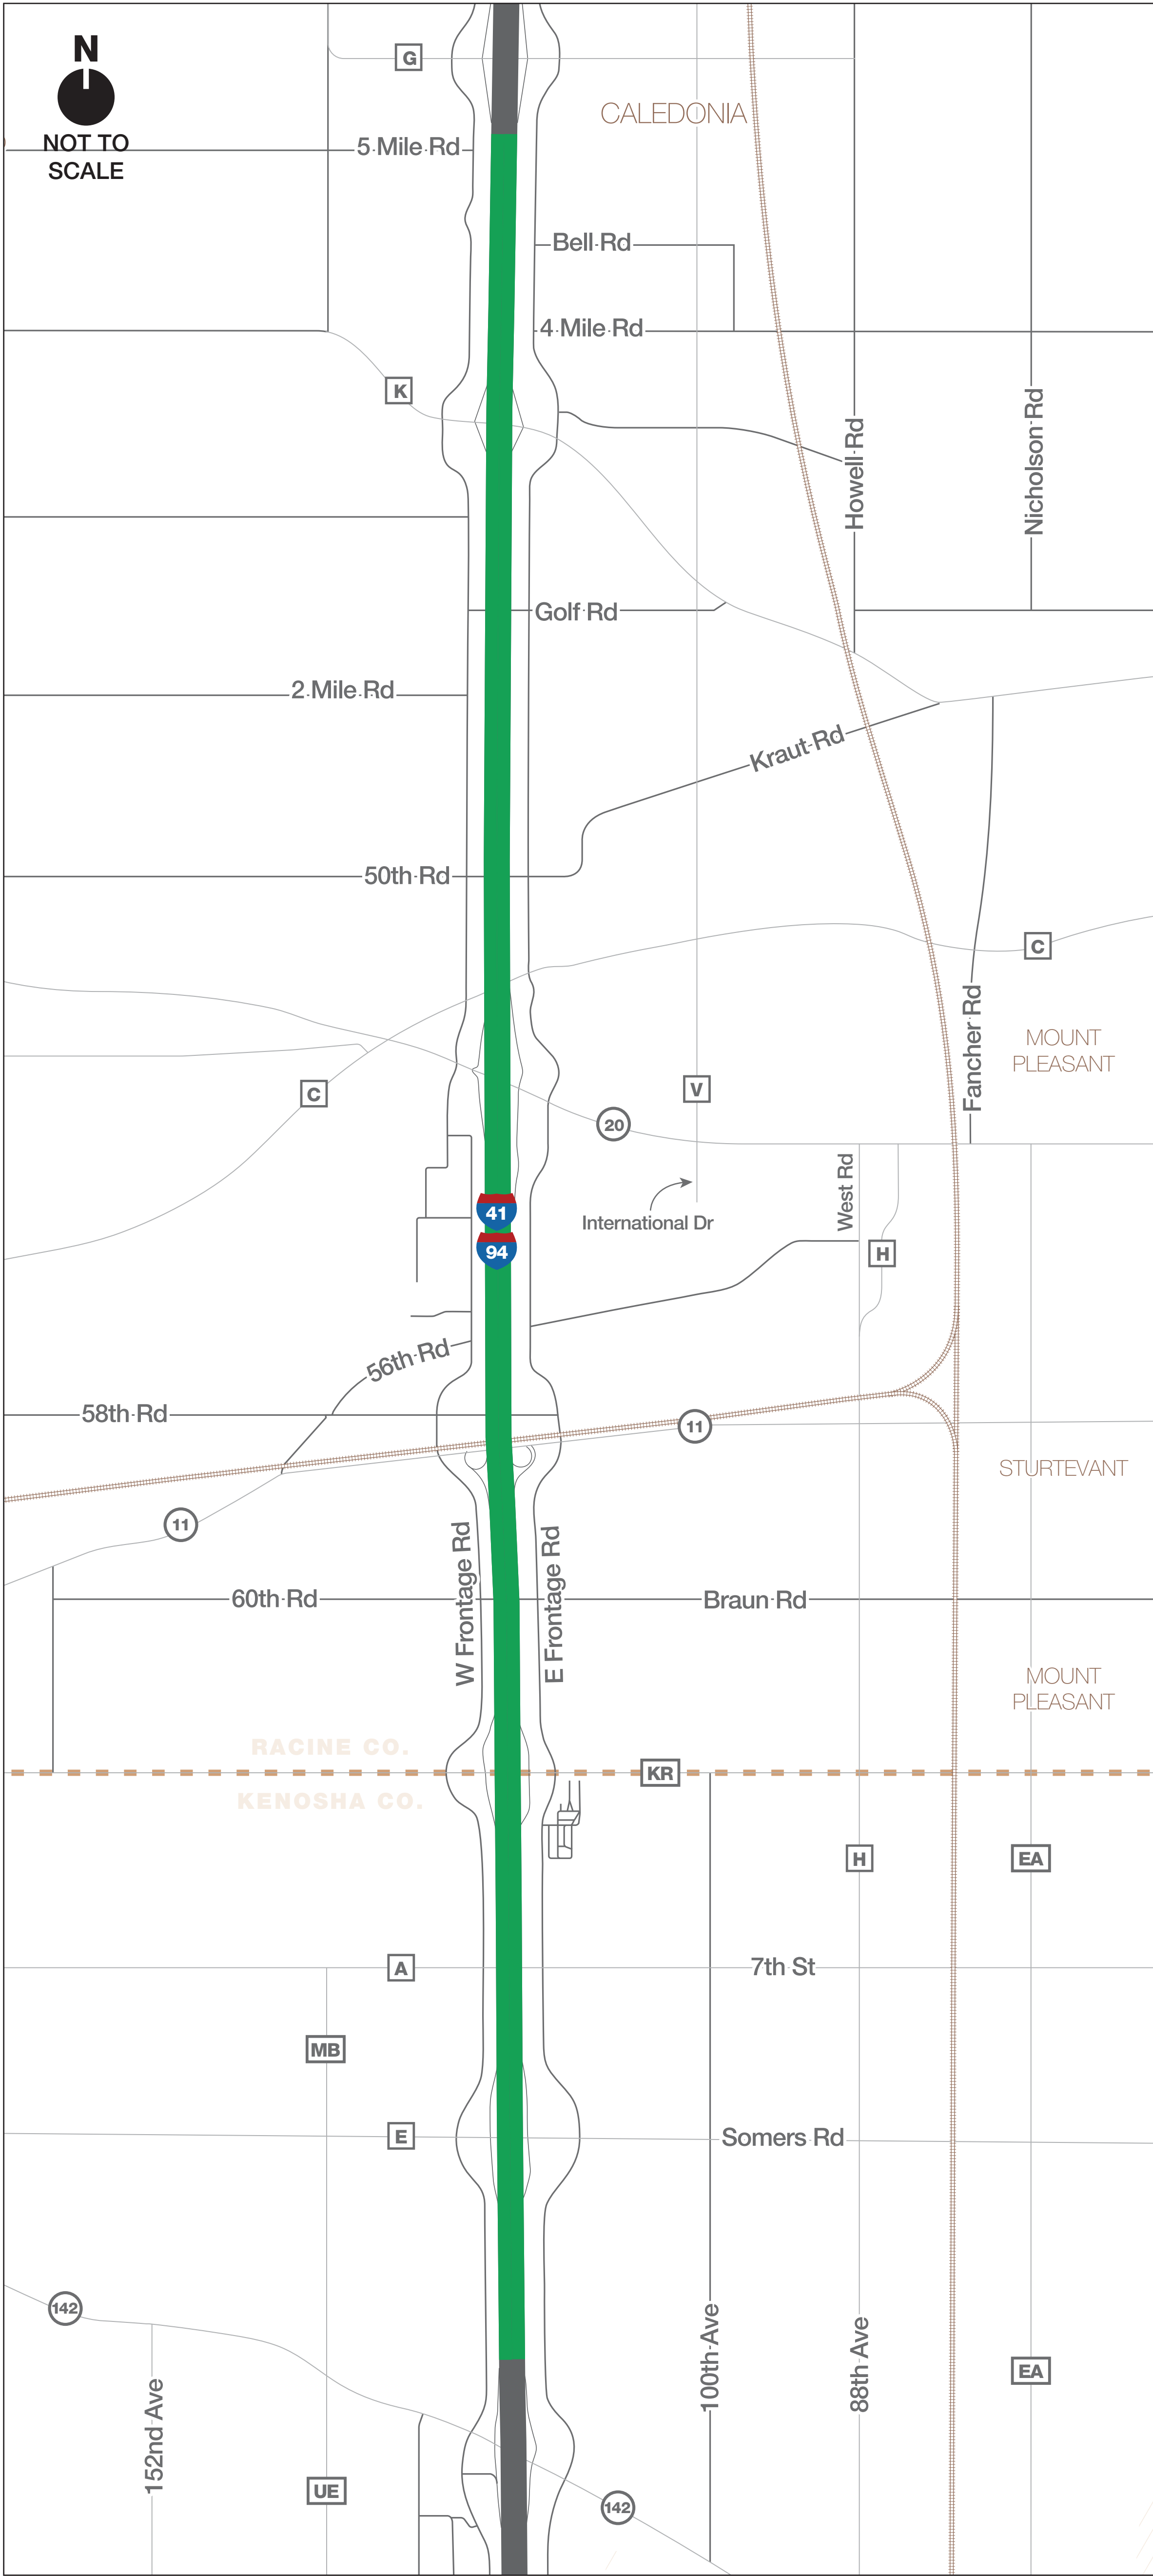

## Schedule Summary

Mar-Apr 2018 I-94 from County G to WIS 142

## Project Scope Summary

First stage of reconstruction of I-94 from WIS 142 to County G

Widen and rehabilitate shoulders to handle future traffic shifts on the southbound roadway

Install and rehabilitate drainage system in the median

Install barrier wall in the southbound roadway to prepare for two lanes in each direction on the southbound roadway

## Construction Impacts

Long-term southbound lane closures; first the outside lane and then the inside lane

Overnight ramp closures

Material and equipment presence and handling

