



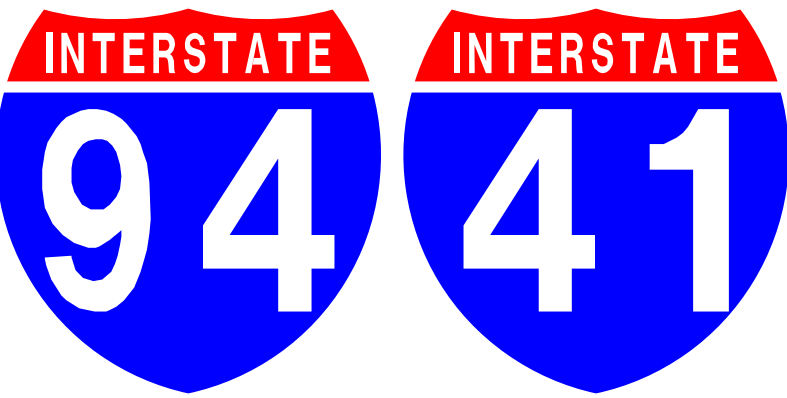

IH-94 STH 142 TO CTH E

Project ID: 1030-23-79 | IH 94 | Kenosha County

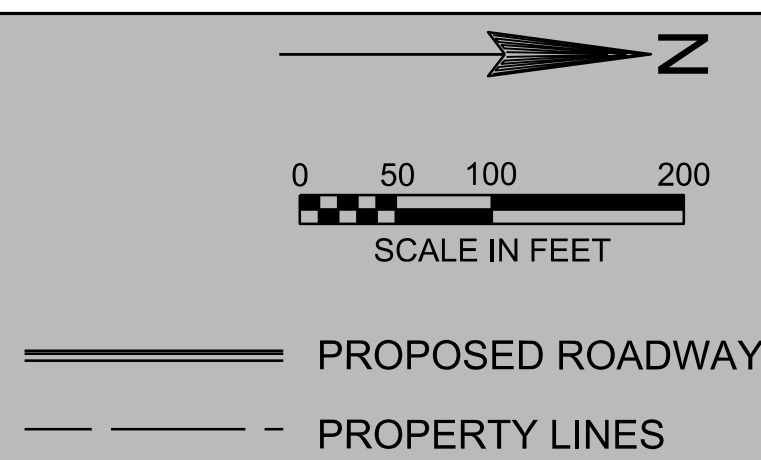

MAJOR ROADWAY ITEMS
I-94 STA 486+00 TO 525+00
REMOVING PAVEMENT: 51,500 SY
EXCAVATION COMMON: 16,000 CY
BORROW: 21,000 CY
BASE AGGREGATE DENSE 1-1/4 INCH: 35,000 TON
SELECT CRUSHED MATERIAL: 70,000 TON
CONCRETE PAVEMENT 12-INCH SPECIAL: 60,000 SY
CONCRETE BARRIER TYPE S42: 12,000 LF

