




## Project ID: 1035-03-79 | IH 94 | Kenosha County

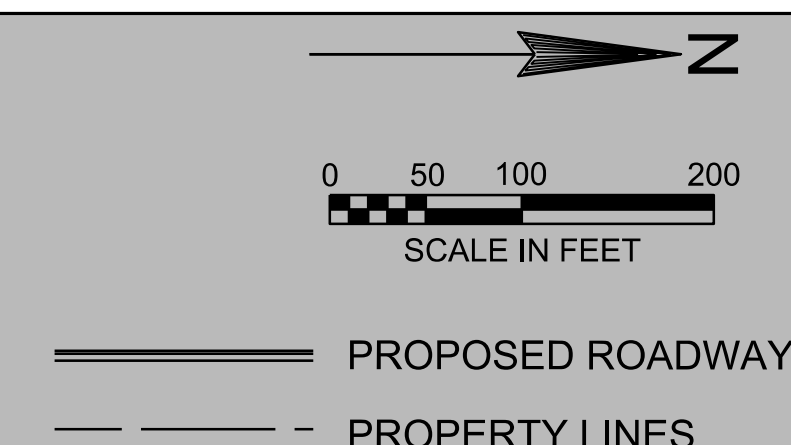

**MAJOR ROADWAY ITEMS**  
**STA 582+00 TO 632+50**

REMOVING PAVEMENT: 66,500 SY  
EXCAVATION COMMON: 46,000 CY  
BORROW: 115,000 CY  
BASE AGGREGATE DENSE 1-1/4 INCH: 42,500 TON  
SELECT CRUSHED MATERIAL: 90,000 TON  
CONCRETE PAVEMENT 12-INCH SPECIAL: 76,500 SY  
CONCRETE BARRIER TYPE S42: 13,000 LF

BRIDGE B-30-111 WING WALL EXTENSION  
(LOOKING EAST AT FRONT FACE OF WALL)  
WING WALL EXTENSION 5,450 SF

BRIDGE B-30-111 WING WALL EXTENSION  
(LOOKING EAST AT FRONT FACE OF WALL)  
WING WALL EXTENSION 250 SF

BRIDGE B-30-112  
LOOKING WEST  
B-30-112: 15,000 SF DECK/TWO SPAN  
15'-9" MIN. CLEARANCE OVER CTH A.

BRIDGE B-30-111  
LOOKING WEST  
B-30-111: 15,000 SF DECK/TWO SPAN,  
15'-4" MIN. CLEARANCE OVER CTH A.

